

Application Of Solar And Wind Units As Primary Energy Sources In Autonomous Networks

Suyarov Anvar¹, Olimov Orifjon², Naarimanov Bakhodir³, Xoshimov Sahob⁴

^{1,2,3,4}Faculty of Power engineering and Radio electronics

Jizzakh Polytechnic Institute

Jizzakh city, Uzbekistan

anvarsuyarov1989@gmail.com

Abstract— The article discusses issues related to the use of solar and wind installations as primary sources of energy, which make it possible to create completely autonomous power plants that provide guaranteed year-round coverage of electrical loads in various climatic conditions.

Keywords— renewable energy sources, autonomous networks, solar installations, wind installations, energy characteristics.

1. INTRODUCTION

In many countries of the world, powerful renewable energy systems are based, as is known, on the use of mono-wind, mono-solar photovoltaic or mono-solar heat generating complexes. At the same time, there are numerous examples of the simultaneous use of two or more types of RES. In Canada, to provide power to remote villages, hybrid schemes are used - wind-diesel and wind - driven. Hydrogen is used to generate electricity in internal combustion engines. The wind-generating scheme is being applied at the Prince Edward Island Wind-Hydrogen Village and in the city of Ramea. The power of the hydrogen generator is 250 kW. It saves 120 thousand liters of fuel annually, thereby preventing emissions into the atmosphere: $CO_2 - 320$ т, $NO_x - 6,8$ т, $SO_2 - 0,6$ т [1-3].

2. EXPERIENCE IN OPERATING COMPLEX RENEWABLE ENERGY SYSTEMS ABROAD

The TAFE Tasmania Institute (Australia) has a complex consisting of two wind turbines, an electrolyzer and a diesel plant, which is adapted to work with hydrogen.

An example of the effective use of a wind-diesel energy complex: on Fair Island (Scotland) for a village with a population of 70 people, a power plant with two diesel power plants was built, the first (power - 20 kW) was sufficient for electricity supply in summer, and the other (50 kW) - for electricity supply in winter (see Table 1). Wind conditions on the island are very favorable. The average wind speed is 9.6 m / s. In June 1982, a 50 kW wind farm was installed there. Since then, energy production has increased 3.7 times. The operation of the VDU on Fair Island showed that the cost of electricity received from the diesel power plant was 8 cents / kWh, and from the wind farm 3.5 cents / kWh. A special device was developed for this station, which showed when the energy meter switched to a higher tariff.

Table 1: Energy production at an integrated wind-diesel plant (WDP) (Fair Island) for a year of operation

Energy production on Fair Island in one year	Power generation	
	abs. number, kW h	Relative quantity, %
Integrated VDU	185 024	100,00
Wind farm	168 895	91,28
DES	16 147	8,72

The study found that the most likely hours of sunshine are distributed symmetrically around noon [2].

3. ANALYSIS OF COMPLEX RENEWABLE ENERGY SYSTEMS

In the course of the study, scientists established the averaged values of the intensity of solar radiation h_s with the distribution of the duration of sunshine (S) symmetrically relative to noon. It is proposed to determine the intensity of solar radiation as [3]

$$h_s = h_0 \cdot b_s \cdot \exp\left(-0,25 \frac{S}{S_0}\right), \quad (1)$$

Where, $h_0 = 1360 \text{ Вт/м}^2$ – solar constant; b_s – coefficient depending on the season is given in table. 2; S_0 – possible duration of sunshine (day length), [h].

Coefficient b_s shows the fraction of the solar constant arriving on a horizontal surface at noon. The product of the coefficient b_s by the solar constant allows you to determine the intensity of solar radiation at noon. Coefficient b_s has a pronounced annual course and is of greatest importance in the summer [3].

Table 2: Parameter of the equation of the intensity of solar radiation "within the day" in the southern Urals

Parameters	Monthly											
	1	2	3	4	5	6	7	8	9	10	11	12
b_s	0,3	0,4	0,45	0,5	0,55	0,6	0,55	0,5	0,45	0,4	0,3	0,2

From the average intensity of solar radiation, given for the corresponding duration of sunshine, it is easy to determine the solar radiation for a given time S :

$$H_s = h_s S. \quad (2)$$

For an objective assessment of the incoming solar energy, it is necessary to know the probability of the appearance of the sunshine duration, which characterizes its supply $p(S)$. The probabilistic characteristic of the daytime sunshine duration is determined for each month according to the observations of the meteorological service.

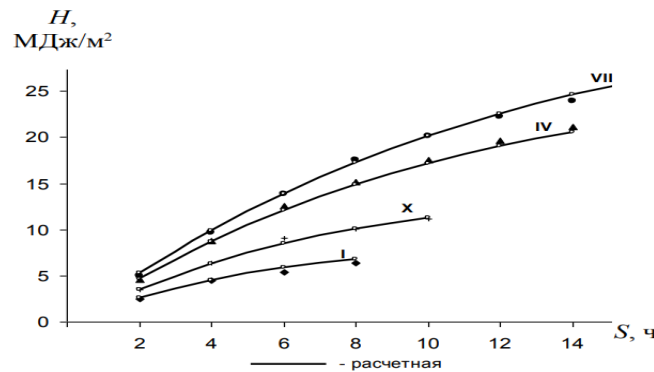


Fig 1. Dependence of total solar radiation on the duration of sunshine within the day

It is known that the specific power of the wind flow is represented as an average value for the calculation period and it is necessary to know the average value v^3 . This requires knowing the distribution of the frequency of the wind speed, which can be determined for each month from the observation data [4-6].

It is known that the specific power of the wind flow is represented as an average value for the calculation period and it is necessary to know the average value v^3 . This requires knowing the distribution of the frequency of the wind speed, which can be determined for each month from the observation data. Then, by empirical repeatability ($t_{*(v)}$) or the differential function $f(v)$ of the wind speed

distribution, you can determine the expected average power of the wind flow for the design period, W / M^2 ,

$$\bar{N}_0 = \frac{1}{2} \rho \int_0^{\infty} v^3 f(v) dv = \frac{1}{2} \rho (v^3)_{cp} \quad (3)$$

It is recommended to determine the average value of the wind flow power per day. Then the wind speed at which the average daily wind power is expected is presented as the energy characteristic of the wind. The dependence of the energy characteristic of the wind flow on the average wind speed (see Fig. 2) is well approximated by an equation of the form [7-9]

$$v_{cp.M} = 1,4 + 1,1 v_{cp} \quad (4)$$

Where $v_{cp.M}$ – average wind speed per month, M/c

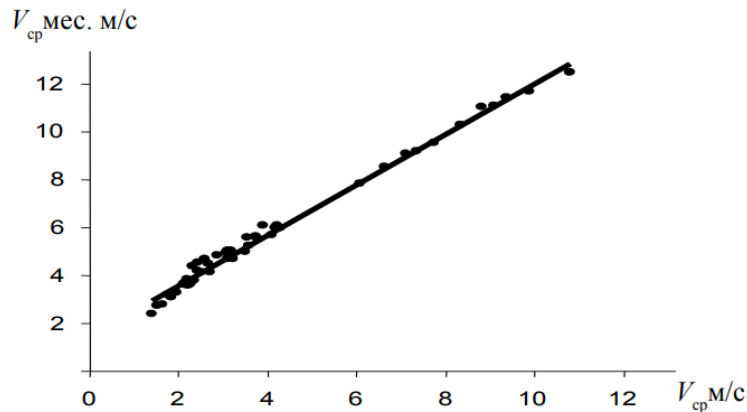


Fig 2. Dependence of the energy characteristics of the wind flow on the average wind speed

The lack of research was the lack of an implemented system for the integrated use of various types of RES for a full-scale approbation of theoretical calculations [10-12].

4. CONCLUSIONS

In general, the complex use of renewable energy sources has been limited until recently due to objective circumstances and the uncompetitiveness (high cost) of equipment for large-scale use. However, the increase in tariffs for energy services and fossil fuels brings the issue of increasing the efficiency of using available renewable resources to a new level. In connection with the above examples, the problem arises of continuing research and finding optimal solutions for the complex application of renewable energy sources proposed in this study.

Based on this, the following conclusions can be drawn:

- the use of solar and wind installations as primary energy sources makes it possible to create fully autonomous power plants that provide guaranteed year-round coverage of electrical loads, at least for small consumers, in various climatic conditions;
- the most effective are combined installations that optimally (depending on climatic conditions) combine solar and wind installations;
- development of work is required on experimental development and further improvement of mathematical models of autonomous power plants on renewable energy sources, which are the necessary basis for substantiating their optimal configurations, taking into account significantly different real climatic operating conditions and consumer characteristics.

REFERENCES

- [1] Suyarov A. Power Loss Minimization in Distribution System with Integrating Renewable Energy Resources //International Journal of Engineering and Information Systems (IJEAIS). – 2021. – T. 5. – №. 2. – C. 37-40.
- [2] Hasanov M. et al. Optimal Integration of Photovoltaic Based DG Units in Distribution Network Considering Uncertainties //International Journal of Academic and Applied Research (IJAAR), ISSN. – 2021. – C. 2643-9603.
- [3] Tanirbergenov R., Suyarov A., Urinboy J. Application of Solar and Wind Units as Primary Energy Sources in Autonomous Networks //International Journal of Advanced Research in Science, Engineering and Technology. – 2020. – T. 7. – №. 9.

- [4] Hasanov M. et al. Optimal Integration of Wind Turbine Based Dg Units in Distribution System Considering Uncertainties //Khasanov, Mansur, et al." Rider Optimization Algorithm for Optimal DG Allocation in Radial Distribution Network." 2020 2nd International Conference on Smart Power & Internet Energy Systems (SPIES). IEEE. – 2020. – C. 157-159.
- [5] Khasanov, Mansur, et al. "Combined Tree Growth Algorithm for Optimal Location and Size of Multiple DGs with Different Types in Distribution Systems." *2019 IEEE Innovative Smart Grid Technologies-Asia (ISGT Asia)*. IEEE, 2019.
- [6] Urinboy, Jalilov, and Mansur Hasanov. "Improvement Performance Of Radial Distribution System By Optimal Placement Of Photovoltaic Array." *International Journal of Engineering and Information Systems (IJEAIS)* 5.2 (2021): 157-159.
- [7] Kamel, Salah, et al. "Radial Distribution System Reconfiguration for Real Power Losses reduction by Using Salp Swarm Optimization Algorithm." *2019 IEEE Innovative Smart Grid Technologies-Asia (ISGT Asia)*. IEEE, 2019.
- [8] KHASANOV, Mansur, et al. "Optimal planning DG and BES units in distribution system considering uncertainty of power generation and time-varying load." *Turkish Journal of Electrical Engineering & Computer Sciences* 29.2 (2021): 773-795.
- [9] Abdel-Mawgoud, H., et al. "A strategy for PV and BESS allocation considering uncertainty based on a modified Henry gas solubility optimizer." *Electric Power Systems Research* 191 (2021): 106886.
- [10] Abdel-Mawgoud, Hussein, et al. "Simultaneous Allocation of Multiple Distributed Generation Units in Distribution Networks Using Chaotic Grasshopper Optimization Algorithm." *2019 21st International Middle East Power Systems Conference (MEPCON)*. IEEE, 2019.
- [11] Storn, Rainer, and Kenneth Price. "Differential evolution a simple evolution strategy for fast optimization." *Dr. Dobb's journal* 22.4 (1997): 18-24.
- [12] Mashhour, M., M. A. Golkar, and SM Moghaddas Tafreshi. "Optimal sizing and siting of distributed generation in radial distribution network: Comparison of unidirectional and bidirectional power flow scenario." *2009 IEEE Bucharest PowerTech*. IEEE, 2009.